


FIRESTOP PLUG

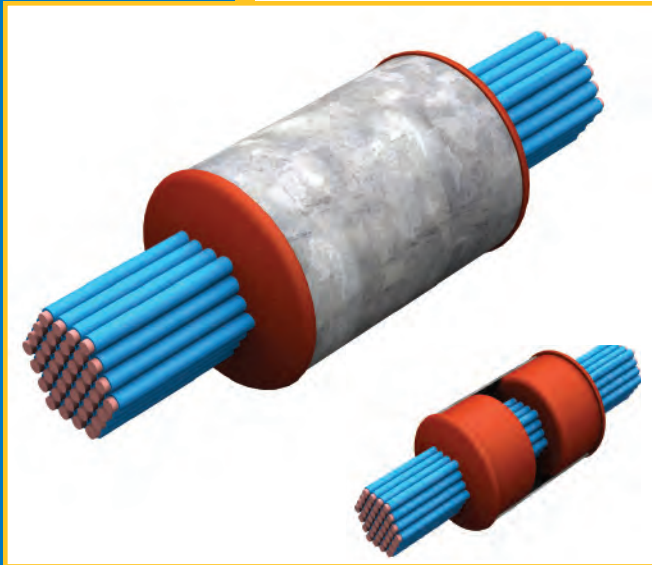

Ready-To-Use Intumescent Flexible Plug For Conduit Sleeves

SpecSeal® Series FP Intumescent Firestop Plugs are designed for temporary or permanent sealing of single or grouped cables and blank openings through common construction such as concrete or gypsum board.

SpecSeal® Series FP Intumescent Firestop Plugs are soft, supple foam plugs molded from polyurethane. Plugs are conveniently sized to fit 2 or 4 in. (51 or 102 mm) diameter openings or sleeves fabricated from electrical metallic tubing (EMT). The intumescent plugs expand when exposed to heat to quickly close off around combustible jacketed cables.



Features & Benefits

- **Fast and easy installation** - no special tools required
- **Intumescent** - expands in all directions for a tough, tight seal
- **Reinstallable** - easy retrofitting of cables
- **Red color** - for easy identification and inspection
- **Soft and resilient foam** - conforms to cable surfaces
- **Smoke resistant** - superior air leakage ratings
- **Convenient** - sized for 2" (51 mm) and 4" (102 mm) EMT or conduit sleeves



APPLICATIONS

- Blank sleeves to 33% cable fill
- Sealing of single or grouped cables of various types; power, voice, data
- Seal 2" (51 mm) or 4" (102 mm) trade size steel sleeves or conduit sleeves
- Blank openings through common construction such as concrete or gypsum board



FILL, VOID OR CAVITY MATERIALS FOR USE IN THROUGH-PENETRATION FIRESTOP SYSTEMS. SEE UL FIRE RESISTANCE DIRECTORY.

3L73

PERFORMANCE

SpecSeal® Series FP Intumescent Firestop Plugs were tested to meet the exacting criteria of ASTM E814 (UL1479) and CAN/ULC S115. Tested systems were developed providing up to 2 hour ratings for penetrations of cables and blank openings through concrete and gypsum board/stud wall assemblies.

PHYSICAL PROPERTIES

Properties	
Product Name	FP Intumescent Firestop Plugs
Color	Red
Nominal Density	19 pcf (304 kg/m ³)
Weight	2 in. – 0.20 lb (91 g)
	4 in. – 0.50 lb (227 g)
Expansion Begins	350° F (176° C)
Volume Expansion	10 X
In-Service Temperature	<130° F (54° C)
Shelf Life	N.A.
VOC Content	N.A.



ORDERING INFORMATION

UPC #	CATALOG NO.	DESCRIPTION	CASE QUANTITY
07202	FP200	Firestop Plug sized for 2 in. (51 mm) opening/sleeve	10
07204	FP400	Firestop Plug sized for 4 in. (102 mm) opening/sleeve	10

WARRANTY

Specified Technologies manufactures its goods in a manner to be free of defects. Should any defect occur in its goods (within one year), Specified Technologies, Inc., upon prompt notification, will at its option, exchange or repair the goods or refund the purchase price.

LIMITATIONS AND EXCLUSIONS

THIS WARRANTY IS IN LIEU OF ALL OTHER REPRESENTATIONS EXPRESSED OR IMPLIED (INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY FOR FITNESS FOR USE) AND UNDER NO CIRCUMSTANCES SHALL SPECIFIED TECHNOLOGIES INC., BE RESPONSIBLE FOR ANY INCIDENTAL OR CONSEQUENTIAL PROPERTY DAMAGE OR LOSSES. PRIOR TO USE, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND THE USER ASSUMES ALL RISKS AND LIABILITY FOR SUBSEQUENT USE.

No statement or recommendations not contained herein shall have any force or effect unless in an agreement signed by officers of seller and manufacturer.

MADE IN THE USA



Specified Technologies Inc.
200 Evans Way
Somerville, NJ 08876 USA
Toll Free: 800-992-1180
Fax: (908) 526-9623
E-mail: specseal@stifirestop.com

www.stifirestop.com

SpecSeal® is a registered trademark of
Specified Technologies Inc.

UL® is a registered trademark of
Underwriters Laboratories, Inc.

Copyright 2009
All rights reserved

ZSTI3307